


Standard	According to OIML class III
Display	30mm (1.2") 5digits LCD/LED
Zero Range	4% F.S.
Tare Range	100% F.S.
Stable Time	≤10seconds
Overload Indication	100% F.S. + 9e
Max. Safety Load	125% F.S.
Ultimate Load	400% F.S.
Battery Life	≥50 hours
Battery Type	Fully sealed Lead-Acid battery, 6V/4.5Ah
Adapter	DC9V/1000mA
Operating Humidity	≤85% RH under 20°C
Remote Controller Distance	Min. 15m
Battery of Remote Controller	AAA battery, 1.5V×2

Specification of Wireless Dynamometer

MODEL	Max. capacity(kg)	Min. weigh(kg)	Division(kg)	Total display counts (n)
DL-01	1000/2200	10/20	0.5/1	2000
DL-02	2000/4400	20/40	1/2	2000
DL-03	3000/6600	20/40	1/2	3000
DL-05	5000/1100	40/80	2/4	2500
DL-10	10000/22000	100/200	5/10	2000
DL-20	20000/44000	200/400	10/20	2000
DL-30	30000/66000	200/400	10/20	3000
DL-50	50000/110000	400/800	20/40	2500
DL-100	100000/220000	1000/2000	50/100	2000
DL-200	200000/440000	2000/4000	100/200	2000

Illusion of Wireless Dynamometer

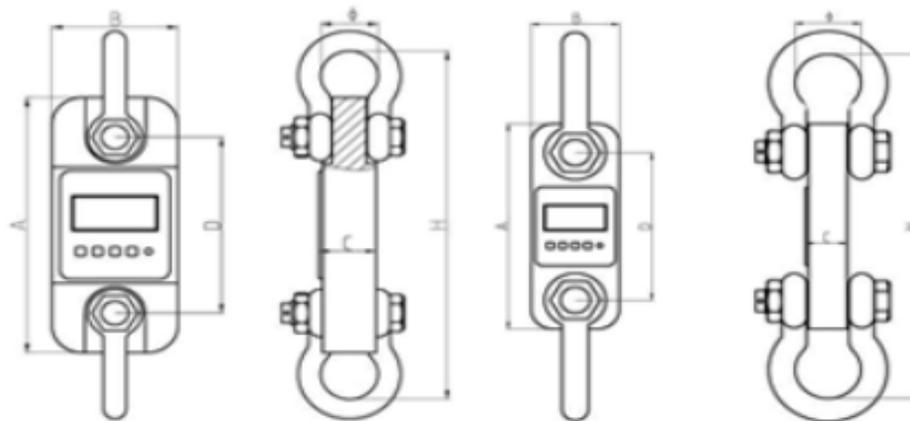

Cap: 1-5t

Cap: 10-200t

MODEL	A (mm)	B (mm)	C (mm)	D (mm)	Φ (mm)	H (mm)	Material
DL-01	245	112	37	190	43	335	Aluminum
DL-02	245	112	37	190	43	335	Aluminum
DL-03	260	123	37	195	51	365	Aluminum
DL-05	285	123	57	210	58	405	Aluminum
DL-10	320	120	57	230	92	535	Alloy Steel
DL-20	420	128	74	260	127	660	Alloy Steel
DL-30	420	138	82	280	146	740	Alloy Steel
DL-50	465	150	104	305	184	930	Alloy Steel
DL-100	570	190	132	366	229	1230	Alloy Steel
DL-200	725	265	183	440	280	1380	Alloy Steel

[BACK TO LIST](#)

上一篇 : [Wireless dyna-link/ Dynamometer](#) 下一篇 : 没有了